

TX station: EXAMPLE

Site name: TEST2

General data of antenna system

TX station	EXAMPLE
Site name	TEST2
Site longitude (+ddd°pp'ss")	
Site latitude (+dd°pp'ss")	
Ground level a.s.l. (m)	100
Antenna system height a.g.l. (m)	50.0
Transmitter power (Watt)	1000.0
Carrier wave frequency (MHz)	98.00
Antenna system central frequency (MHz)	98.00
Filename of antenna base diagrams type 1	LABEL_AKG11.ANT
Filename of antenna base diagrams type 2	
Antenna system polarization (H, V, C, X)	V
Transmitting cable attenuation (dB)	0.0
Additional attenuations (dB)	0.0
Base diagrams sectors (A = all, F = front)	A
Velocity factor of cables to antennas (0÷1)	0.88
Coordinate system (C = cartesian, P = polar)	P
Mast side/diameter (cm):	10.0
Mast cross section (Triangular, Square, Circular)	C
Mast rotation w.r.t. North (°)	0
System picture filename (*.bmp *.gif *.jpg)	

Information about antennas used in the system

Antenna of type 1

Manufacturer	LABEL ITALY
Antenna model	AKG/11 - DIPOLE FM W
Band start (MHz)	87.5
Band stop (MHz)	108
Diagrams frequency (MHz)	98
Polariz. (H, V, C, X)	V
Vertical dist. (cm)	260
Height (cm)	134
Width (cm)	10
Thickness (cm)	91
Weight (Kg)	16
Maximum power (KW)	5
Gain (dBd)	2.16
North E.C. (cm)	0
East E.C. (cm)	0
Return loss (dB)	-22
R.C. phase (°)	0

LABEL ITALY

TX station: EXAMPLE

Site name: TEST2


Geometr. and electrical data of antenna system

	<i>Power (%)</i>	<i>Tilt (°)</i>	<i>Az. (°/N)</i>	<i>Phase (°)</i>	<i>V dist. (m)</i>	<i>Scr-D (cm)</i>	<i>Scr-Az (°/N)</i>	<i>Rot. (1÷4)</i>	<i>Type (1÷2)</i>	<i>L cables (cm)</i>	<i>Car. phase (°)</i>
1	25.000	0	0	0 +0.0	3.75	0.0	0.0	1	1	0.0	0.0
2	25.000	0	0	0 +0.0	1.25	0.0	0.0	1	1	0.0	0.0
3	25.000	0	0	0 +0.0	-1.25	0.0	0.0	1	1	0.0	0.0
4	25.000	0	0	0 +0.0	-3.75	0.0	0.0	1	1	0.0	0.0

TX station: EXAMPLE


Site name: TEST2

Plan of antenna system

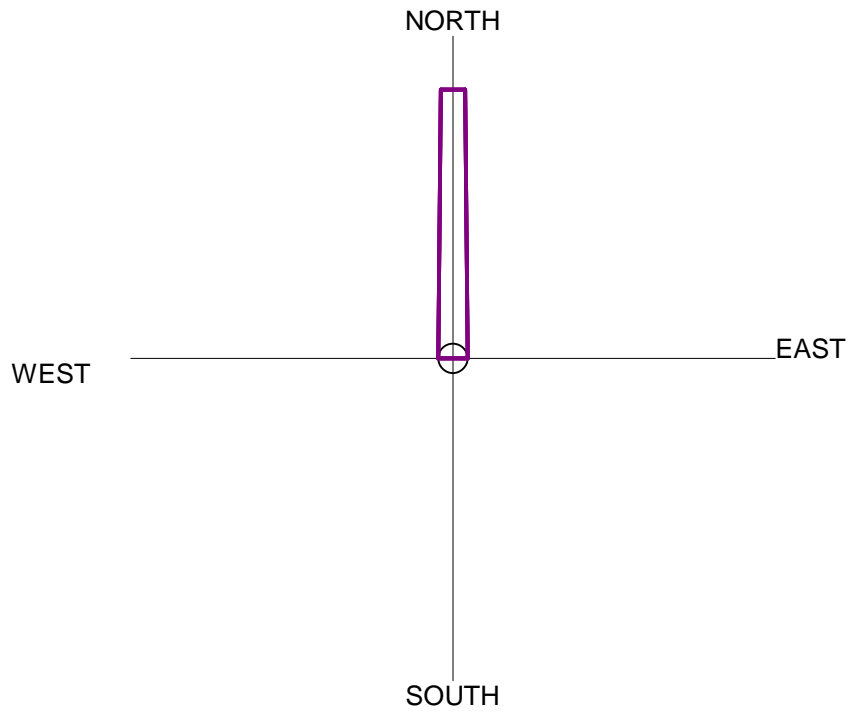

Side of antenna system

0.0°

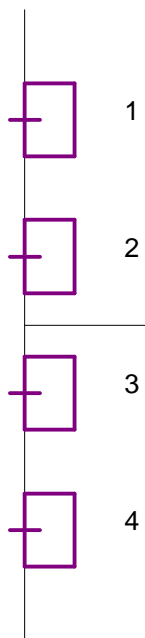

TX station: EXAMPLE
 Frequency: 98.00 MHz

Site name: TEST2

Antennas arrays data

A. Antennas array azimuth (°/N)	0
B. Number of antennas	4
C. Nominal power supply (W)	1000.00
D. Losses (addit. + cables) (dB)	0.0
E. Effective power supply (W)	1000.00
F. Theor. maximum gain (dBd)	8.18
G. Distribution losses (dB)	0.00
H. Nominal max gain [F - G] (dBd)	8.18
I. Compensation losses (dB)	0.00
J. Effec. max gain [H - I] (dBd)	8.18
K. Effec. max gain (times)	6.58
L. Effec. max power [E * K] (KW)	6.5775
M. Max power depr. angle (°)	0.0
N. Max power az. angle (°)	340

Diagram in dBK calculated at horizon


Az. (°/N)	dBK	Az. (°/N)	dBK	Az. (°/N)	dBK	Az. (°/N)	dBK
0	8.2	90	5.3	180	2.0	270	5.3
10	8.2	100	4.4	190	2.0	280	6.1
20	8.2	110	3.5	200	2.1	290	6.9
30	8.1	120	2.9	210	2.2	300	7.4
40	8.0	130	2.5	220	2.3	310	7.8
50	7.8	140	2.3	230	2.5	320	8.0
60	7.4	150	2.2	240	2.9	330	8.1
70	6.9	160	2.1	250	3.5	340	8.2
80	6.1	170	2.0	260	4.4	350	8.2

LABEL ITALY

TX station: EXAMPLE
Frequency: 98.00 MHz

Site name: TEST2

Horizontal diagram

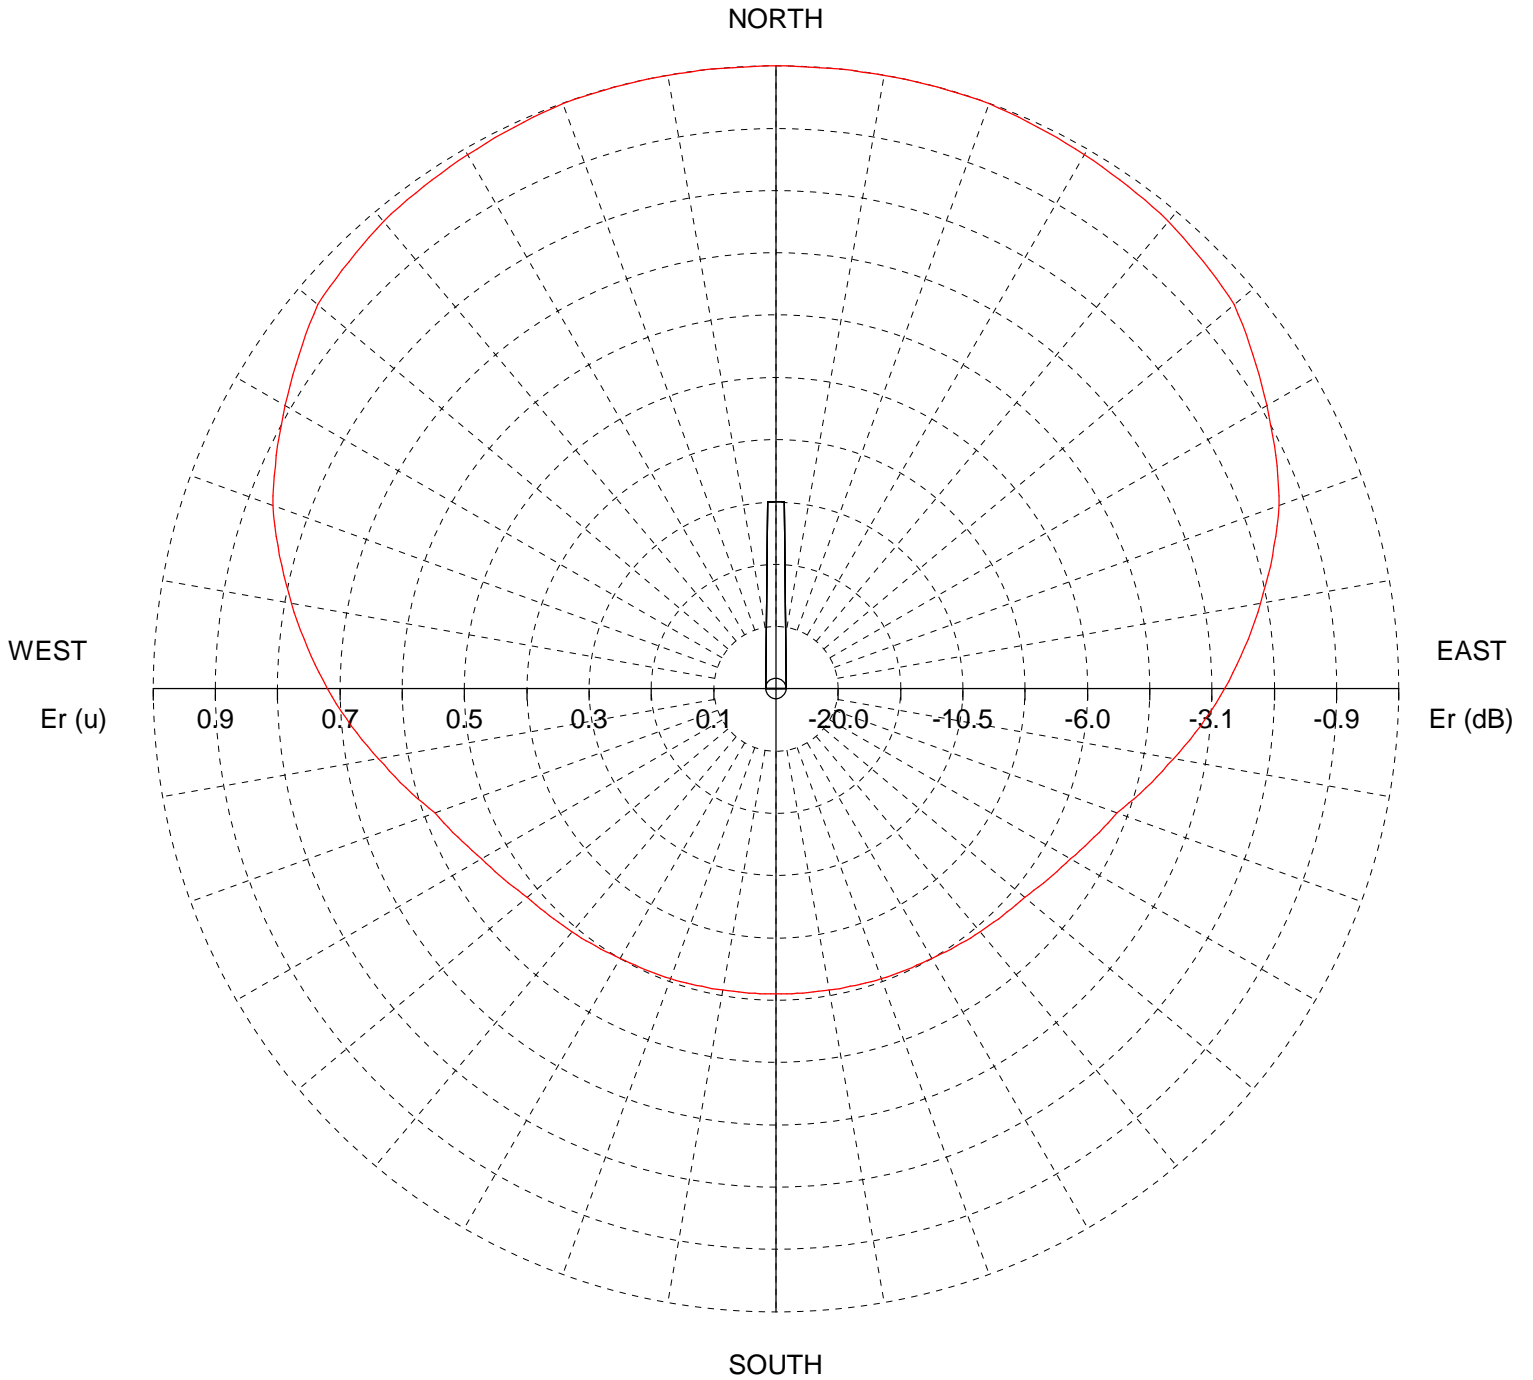


— 0.0° depres. (Total antenna), Gain (dBd): 8.18 ERP T.max (KW): 6.577 ERP E.max (KW): 6.577

TX station: EXAMPLE
Frequency: 98.00 MHz

Site name: TEST2

Vertical diagram

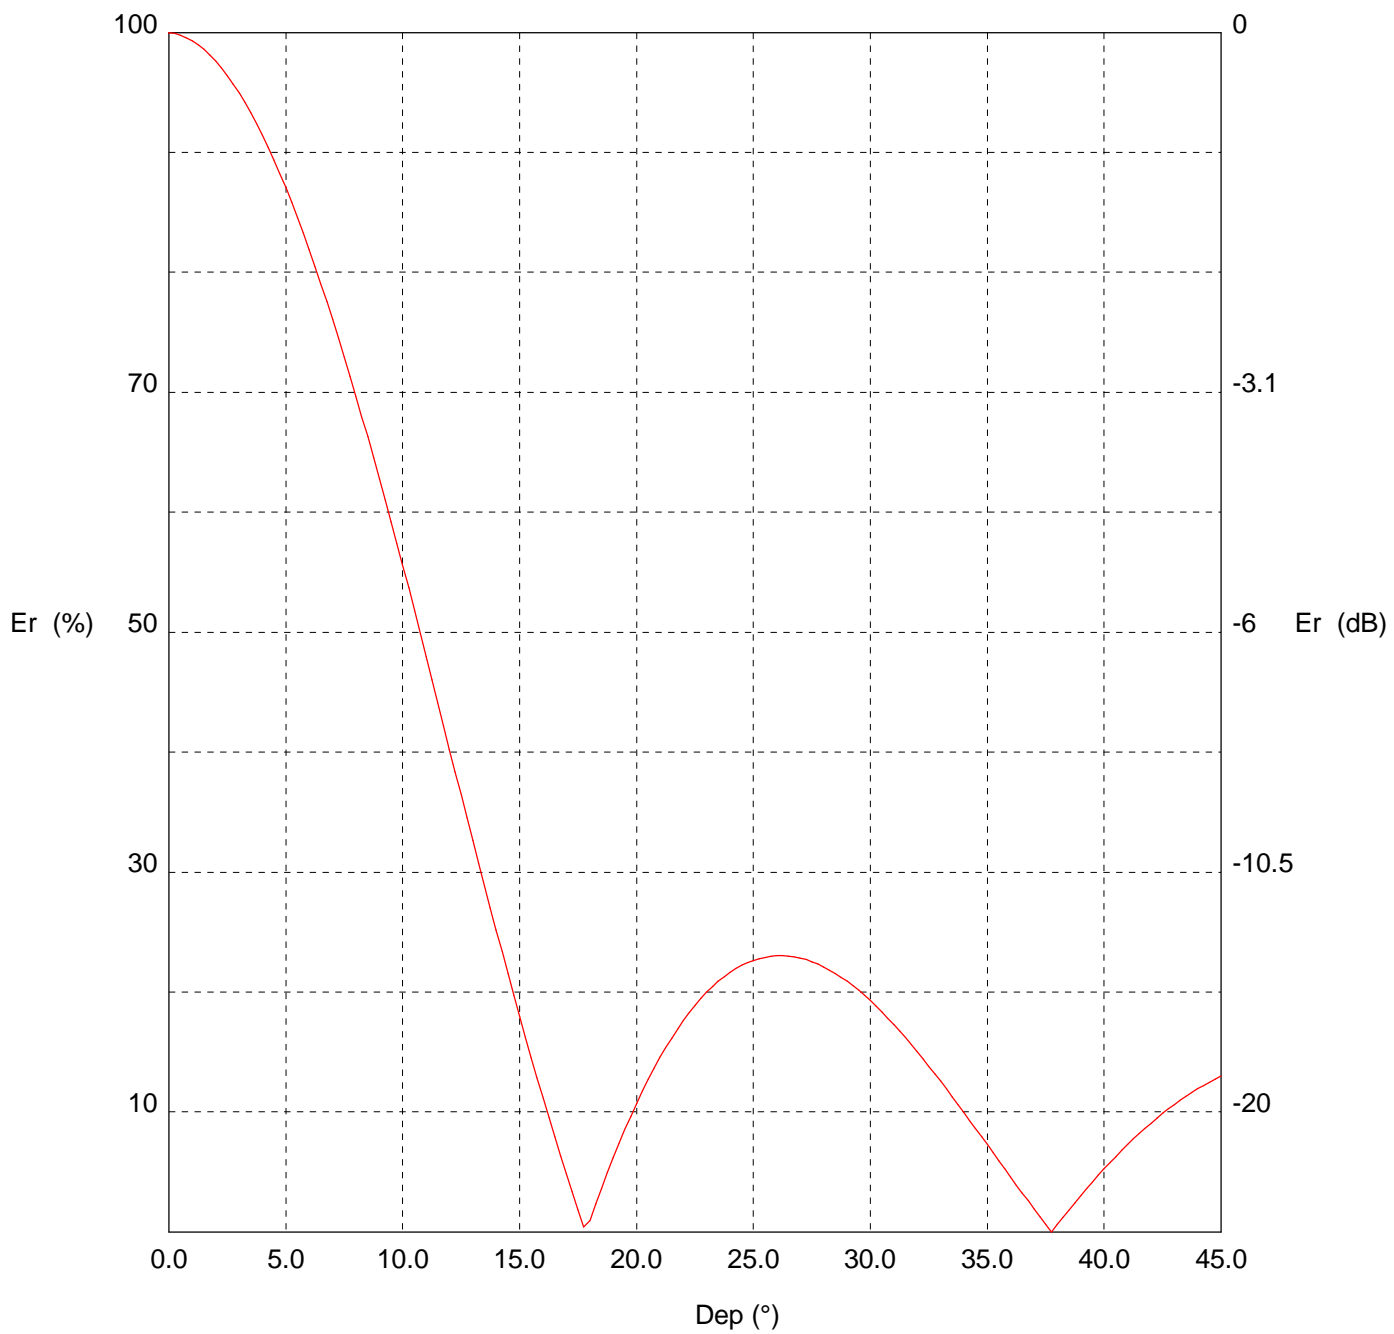

— 0.0° Az. (Total antenna)