

TX station: EXAMPLE

Site name: TEST13

General data of antenna system

TX station	EXAMPLE
Site name	TEST13
Site longitude (+ddd°pp'ss")	
Site latitude (+dd°pp'ss")	
Ground level a.s.l. (m)	100
Antenna system height a.g.l. (m)	50.0
Transmitter power (Watt)	1000.0
Carrier wave frequency (MHz)	98.00
Antenna system central frequency (MHz)	98.00
Filename of antenna base diagrams type 1	AKK1.ANT
Filename of antenna base diagrams type 2	
Antenna system polarization (H, V, C)	V
Transmitting cable attenuation (dB)	0.3
Additional attenuations (dB)	0.3
Base diagrams sectors (A = all, F = front)	A
Velocity factor of cables to antennas (0÷1)	0.89
Coordinate system (C = cartesian, P = polar)	P
Mast side/diameter (cm):	10.0
Mast cross section (Triangular, Square, Circular)	C
Mast rotation w.r.t. North (°)	0
Project picture filename (*.bmp)	

Information about antennas used in the project*Antenna of type 1*

Manufacturer	LABEL ELETTRONICA
Antenna model	AKK/1 - PANNELLO FM
Band start (MHz)	87.5
Band stop (MHz)	108
Diagrams frequency (MHz)	98
Polariz. (H, V, C)	V
Vertical dist. (cm)	270
Height (cm)	200
Width (cm)	128
Thickness (cm)	85
Weight (Kg)	27
Maximum power (KW)	2
Gain (dBd)	5.9
North E.C. (cm)	0
East E.C. (cm)	0
Return loss (dB)	-24.56
R.C. phase (°)	164.74

TX station: EXAMPLE

Site name: TEST13


Geometr. and electrical data of antenna system

	<i>Power</i> (%)	<i>Tilt</i> (°)	<i>Az.</i> (°/N)	<i>Phase</i> (°)		<i>V dist.</i> (m)	<i>Scr-D</i> (cm)	<i>Scr-Az</i> (°/N)	<i>Rot.</i> (1÷4)	<i>Type</i> (1÷2)	<i>L cables</i> (cm)	<i>Car. phase</i> (°)
1	50.000	0	0	0 + 0		1.25	0.0	0.0	1	1	0.0	0.0
2	50.000	0	0	0 + 0		-1.25	0.0	0.0	1	1	0.0	0.0

TX station: EXAMPLE


Site name: TEST13

Plan of antenna system

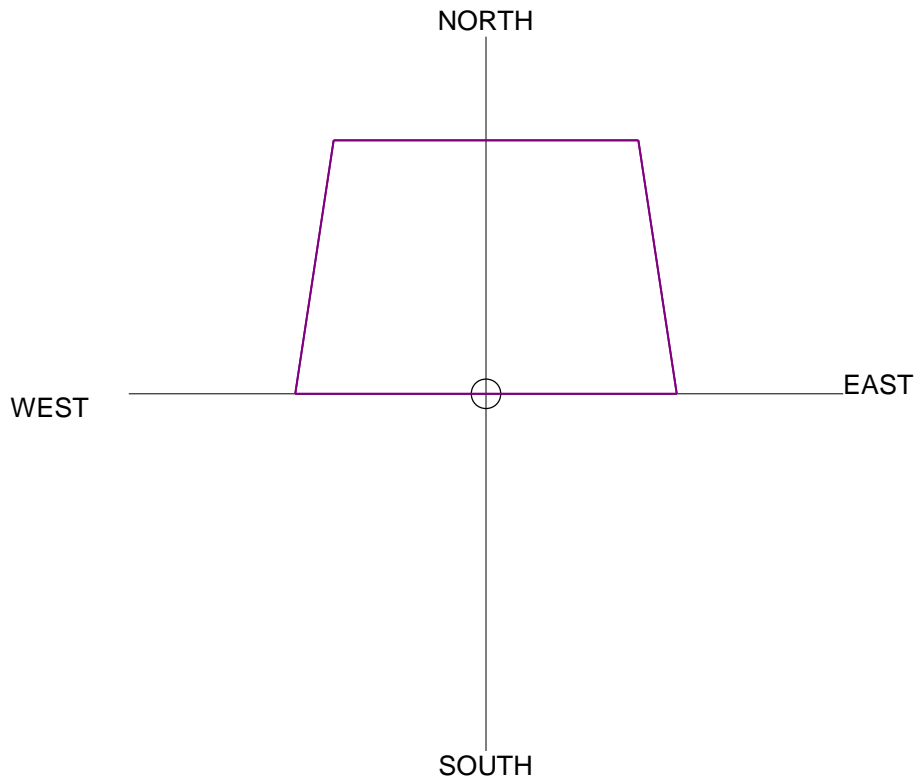

Side of antenna system

Az. 0°



TX station: EXAMPLE
 Frequency: 98.00 MHz

Site name: TEST13

Antennas arrays data

A. Antennas array azimuth (°N)	0
B. Number of antennas	2
C. Nominal power supply (W)	1000.00
D. Losses (addit. + cables) (dB)	0.6
E. Effective power supply (W)	870.96
F. Theor. maximum gain (dBd)	8.91
G. Distribution losses (dB)	0.00
H. Nominal max gain [F - G] (dBd)	8.91
I. Compensation losses (dB)	0.00
J. Effec. max gain [H - I] (dBd)	8.91
K. Effec. max gain (times)	7.78
L. Effec. max power [E * K] (KW)	6.7769
M. Max power depr. angle (°)	0.0


Diagram in dBK calculated at horizon

Az. (°N)	dBK	Az. (°N)	dBK	Az. (°N)	dBK	Az. (°N)	dBK
0	8.3	90	3.6	180	-4.6	270	3.6
10	8.3	100	2.0	190	-4.8	280	4.9
20	8.2	110	0.2	200	-5.1	290	5.9
30	7.9	120	-1.7	210	-5.2	300	6.7
40	7.7	130	-3.4	220	-4.7	310	7.2
50	7.2	140	-4.7	230	-3.4	320	7.7
60	6.7	150	-5.2	240	-1.7	330	7.9
70	5.9	160	-5.1	250	0.2	340	8.2
80	4.9	170	-4.8	260	2.0	350	8.3

TX station: EXAMPLE
Frequency: 98.00 MHz

Site name: TEST13

Horizontal diagram

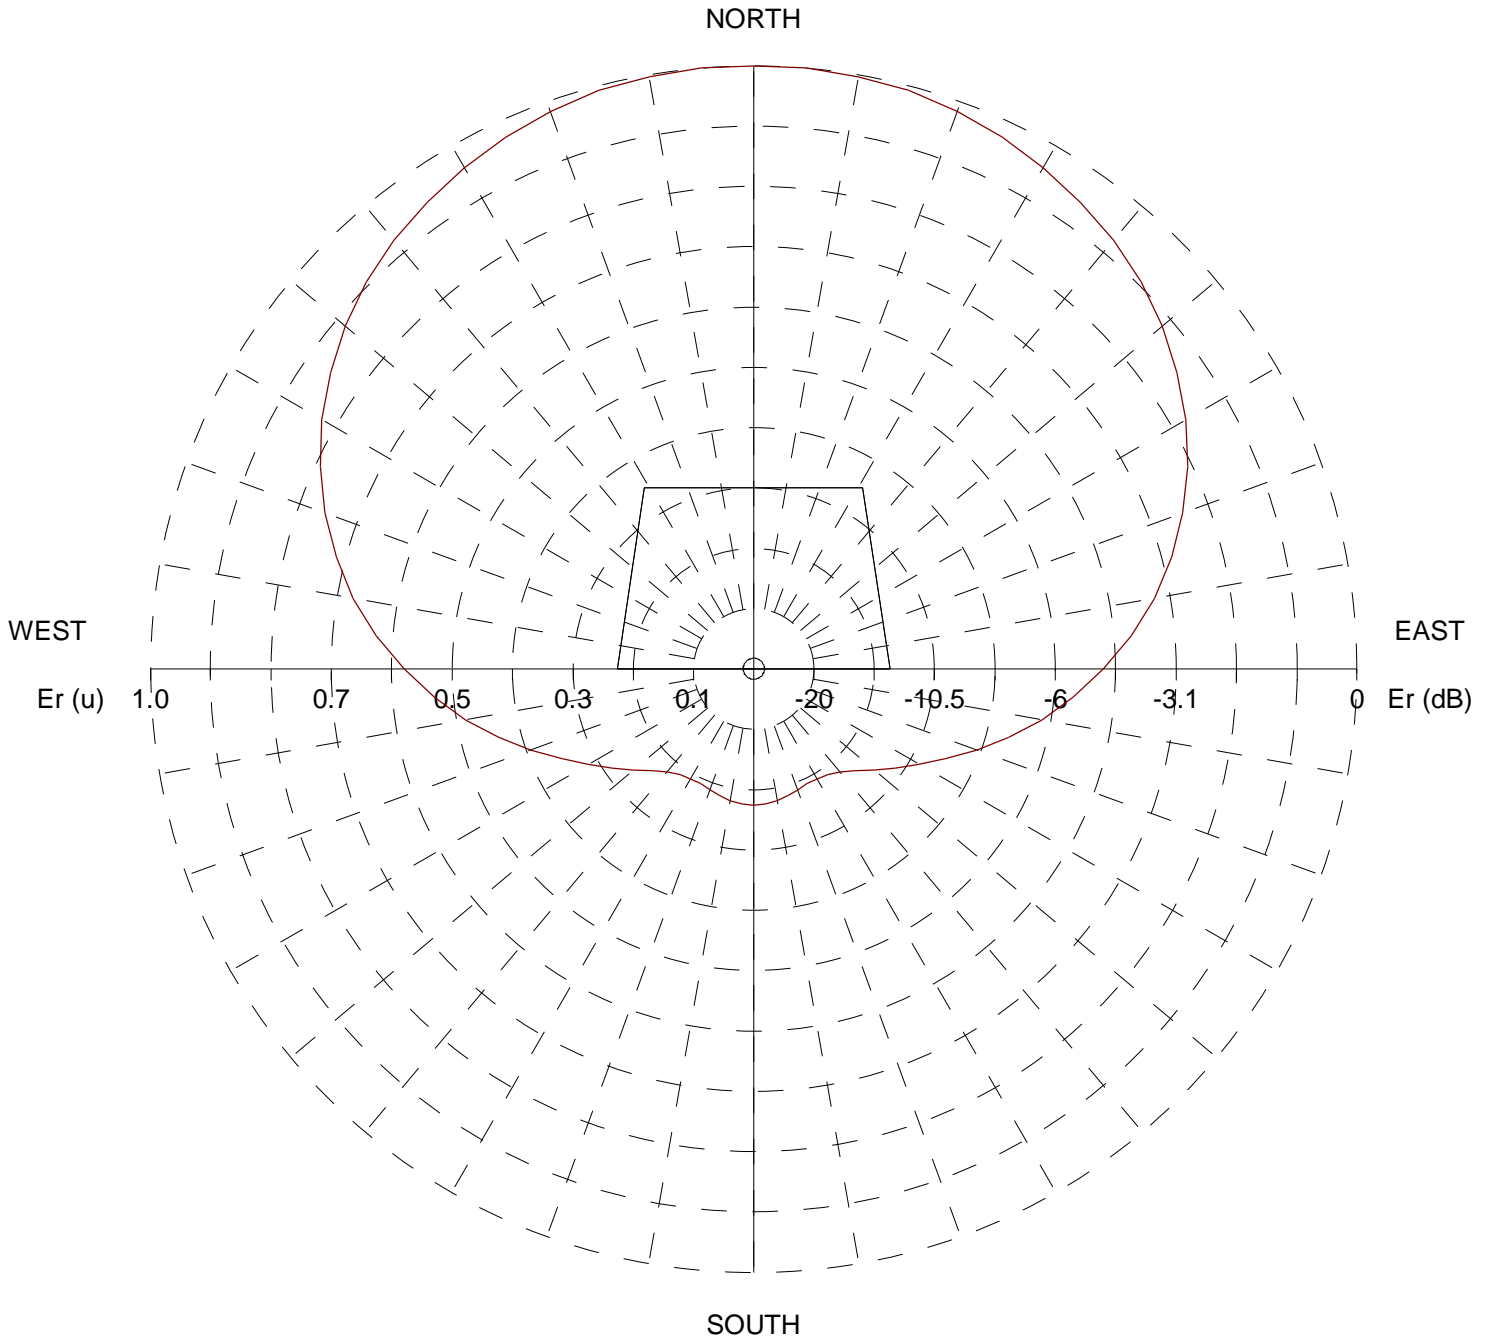

— 0.0° depres. (Total antenna), Gain (dBd): 8.9 ERP T.max (KW): 7.781 ERP E.max (KW): 6.777

TX station: EXAMPLE
Frequency: 98.00 MHz

Site name: TEST13

Vertical diagram

