

TX station: EXAMPLE

Site name: TEST12

General data of antenna system

TX station	EXAMPLE
Site name	TEST12
Site longitude (+ddd°pp'ss")	
Site latitude (+dd°pp'ss")	
Ground level a.s.l. (m)	100
Antenna system height a.g.l. (m)	50.0
Transmitter power (Watt)	1000.0
Carrier wave frequency (MHz)	98.00
Antenna system central frequency (MHz)	98.00
Filename of antenna base diagrams type 1	AKG7.ANT
Filename of antenna base diagrams type 2	
Antenna system polarization (H, V, C)	V
Transmitting cable attenuation (dB)	0.5
Additional attenuations (dB)	0.5
Base diagrams sectors (A = all, F = front)	A
Velocity factor of cables to antennas (0÷1)	0.89
Coordinate system (C = cartesian, P = polar)	P
Mast side/diameter (cm):	10.0
Mast cross section (Triangular, Square, Circular)	C
Mast rotation w.r.t. North (°)	0
Project picture filename (*.bmp)	

Information about antennas used in the project*Antenna of type 1*

Manufacturer	LABEL ITALY SRL
Antenna model	AKG/7
Band start (MHz)	87.5
Band stop (MHz)	108
Diagrams frequency (MHz)	98
Polariz. (H, V, C)	C
Vertical dist. (cm)	260
Height (cm)	124
Width (cm)	115
Thickness (cm)	150
Weight (Kg)	11
Maximum power (KW)	5
Gain (dBd)	-1.49
North E.C. (cm)	0
East E.C. (cm)	0
Return loss (dB)	-30
R.C. phase (°)	-140.4

TX station: EXAMPLE

Site name: TEST12


Geometr. and electrical data of antenna system

	<i>Power</i> (%)	<i>Tilt</i> (°)	<i>Az.</i> (°/N)	<i>Phase</i> (°)	<i>V dist.</i> (m)	<i>Scr-D</i> (cm)	<i>Scr-Az</i> (°/N)	<i>Rot.</i> (1÷4)	<i>Type</i> (1÷2)	<i>L cables</i> (cm)	<i>Car. phase</i> (°)
1	12.500	0	0	0 + 0	8.75	0.0	0.0	1	1	0.0	0.0
2	12.500	0	0	0 + 0	6.25	0.0	0.0	1	1	0.0	0.0
3	12.500	0	0	0 + 0	3.75	0.0	0.0	1	1	0.0	0.0
4	12.500	0	0	0 + 0	1.25	0.0	0.0	1	1	0.0	0.0
5	12.500	0	0	0 + 0	-1.25	0.0	0.0	1	1	0.0	0.0
6	12.500	0	0	0 + 0	-3.75	0.0	0.0	1	1	0.0	0.0
7	12.500	0	0	0 + 0	-6.25	0.0	0.0	1	1	0.0	0.0
8	12.500	0	0	0 + 0	-8.75	0.0	0.0	1	1	0.0	0.0

TX station: EXAMPLE


Site name: TEST12

Plan of antenna system

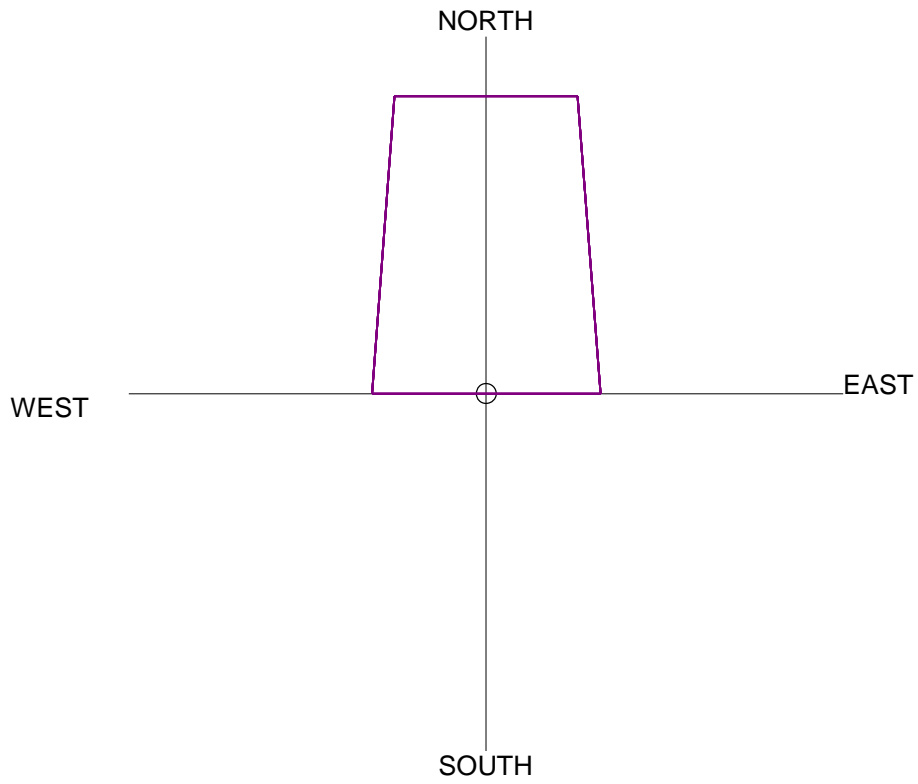

Side of antenna system

Az. 0°

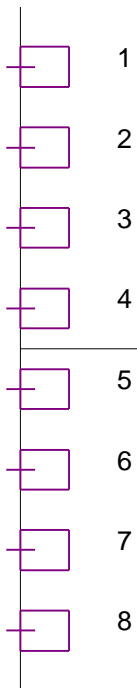

TX station: EXAMPLE

Site name: TEST12

Frequency: 98.00 MHz

Antennas arrays data

A. Antennas array azimuth (°N)	0
B. Number of antennas	8
C. Nominal power supply (W)	1000.00
D. Losses (addit. + cables) (dB)	1.0
E. Effective power supply (W)	794.33
F. Theor. maximum gain (dBd)	7.54
G. Distribution losses (dB)	0.00
H. Nominal max gain [F - G] (dBd)	7.54
I. Compensation losses (dB)	0.00
J. Effec. max gain [H - I] (dBd)	7.54
K. Effec. max gain (times)	5.68
L. Effec. max power [E * K] (KW)	4.5091
M. Max power depr. angle (°)	0.0

Diagram in dBK calculated at horizon


Az. (°N)	dBK	Az. (°N)	dBK	Az. (°N)	dBK	Az. (°N)	dBK
0	6.5	90	6.2	180	0.2	270	6.2
10	6.6	100	5.3	190	0.4	280	6.8
20	6.6	110	4.1	200	0.7	290	7.1
30	6.8	120	2.9	210	1.0	300	7.2
40	7.0	130	2.1	220	1.5	310	7.1
50	7.1	140	1.5	230	2.1	320	7.0
60	7.2	150	1.0	240	2.9	330	6.8
70	7.1	160	0.7	250	4.1	340	6.6
80	6.8	170	0.4	260	5.3	350	6.6

TX station: EXAMPLE

Site name: TEST12

Frequency: 98.00 MHz

Horizontal diagram

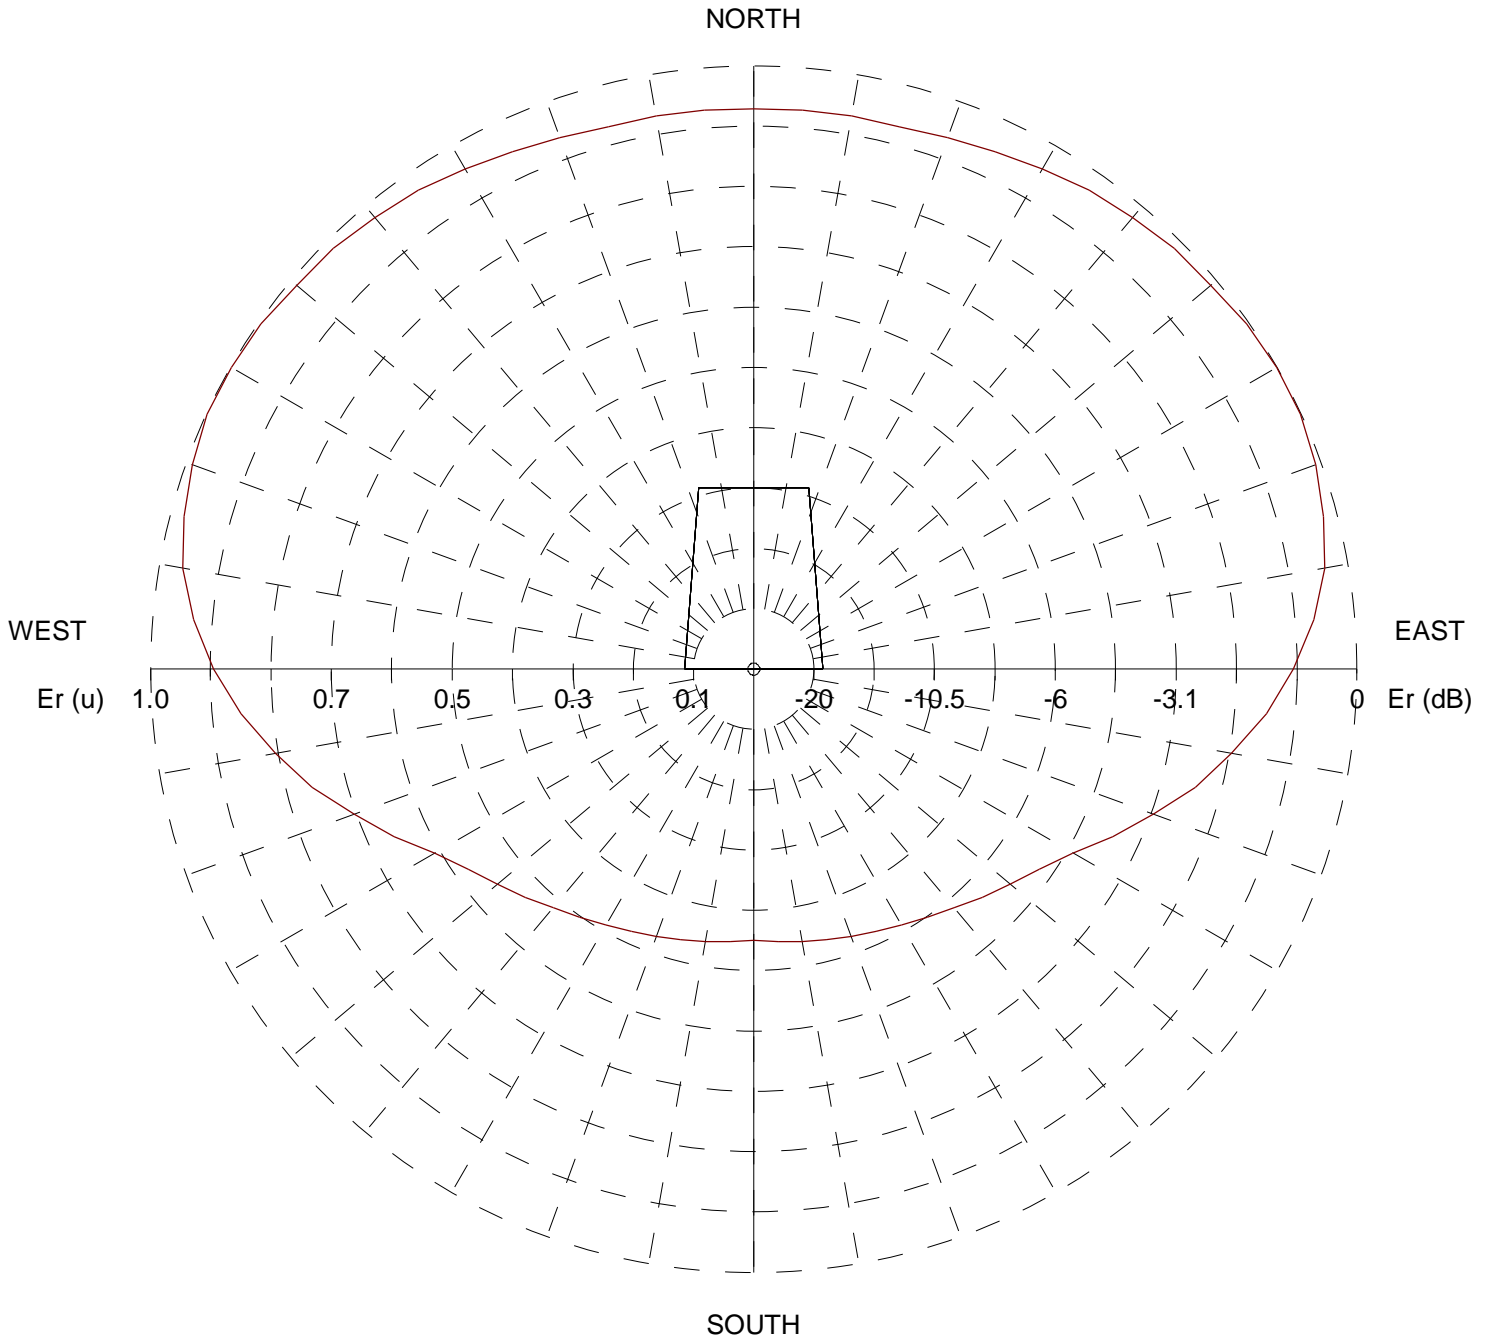

— 0.0° depres. (Total antenna), Gain (dBd): 8.2 ERP T.max (KW): 6.582 ERP E.max (KW): 5.228

TX station: EXAMPLE

Site name: TEST12

Frequency: 98.00 MHz

Vertical diagram

