

TX station: EXAMPLE

Site name: TEST16

General data of antenna system

TX station	EXAMPLE
Site name	TEST16
Site longitude (+ddd°pp'ss")	
Site latitude (+dd°pp'ss")	
Ground level a.s.l. (m)	100
Antenna system height a.g.l. (m)	50.0
Transmitter power (Watt)	1000.0
Carrier wave frequency (MHz)	98.00
Antenna system central frequency (MHz)	98.00
Filename of antenna base diagrams type 1	AKK1.ANT
Filename of antenna base diagrams type 2	
Antenna system polarization (H, V, C)	V
Transmitting cable attenuation (dB)	0.5
Additional attenuations (dB)	0.5
Base diagrams sectors (A = all, F = front)	A
Velocity factor of cables to antennas (0÷1)	0.89
Coordinate system (C = cartesian, P = polar)	P
Mast side/diameter (cm):	10.0
Mast cross section (Triangular, Square, Circular)	C
Mast rotation w.r.t. North (°)	0
Project picture filename (*.bmp)	

Information about antennas used in the project*Antenna of type 1*

Manufacturer	LABEL ELETTRONICA
Antenna model	AKK/1 - PANNELLO FM
Band start (MHz)	87.5
Band stop (MHz)	108
Diagrams frequency (MHz)	98
Polariz. (H, V, C)	V
Vertical dist. (cm)	270
Height (cm)	200
Width (cm)	128
Thickness (cm)	85
Weight (Kg)	27
Maximum power (KW)	2
Gain (dBd)	5.9
North E.C. (cm)	0
East E.C. (cm)	0
Return loss (dB)	-24.56
R.C. phase (°)	164.74

TX station: EXAMPLE

Site name: TEST16


Geometr. and electrical data of antenna system

	<i>Power</i> (%)	<i>Tilt</i> (°)	<i>Az.</i> (°/N)	<i>Phase</i> (°)	<i>V dist.</i> (m)	<i>Scr-D</i> (cm)	<i>Scr-Az</i> (°/N)	<i>Rot.</i> (1÷4)	<i>Type</i> (1÷2)	<i>L cables</i> (cm)	<i>Car. phase</i> (°)
1	12.500	0	0	0 + 0	8.75	0.0	0.0	1	1	0.0	0.0
2	12.500	0	0	0 + 0	6.25	0.0	0.0	1	1	0.0	0.0
3	12.500	0	0	0 + 0	3.75	0.0	0.0	1	1	0.0	0.0
4	12.500	0	0	0 + 0	1.25	0.0	0.0	1	1	0.0	0.0
5	12.500	0	0	0 + 0	-1.25	0.0	0.0	1	1	0.0	0.0
6	12.500	0	0	0 + 0	-3.75	0.0	0.0	1	1	0.0	0.0
7	12.500	0	0	0 + 0	-6.25	0.0	0.0	1	1	0.0	0.0
8	12.500	0	0	0 + 0	-8.75	0.0	0.0	1	1	0.0	0.0

TX station: EXAMPLE


Site name: TEST16

Plan of antenna system

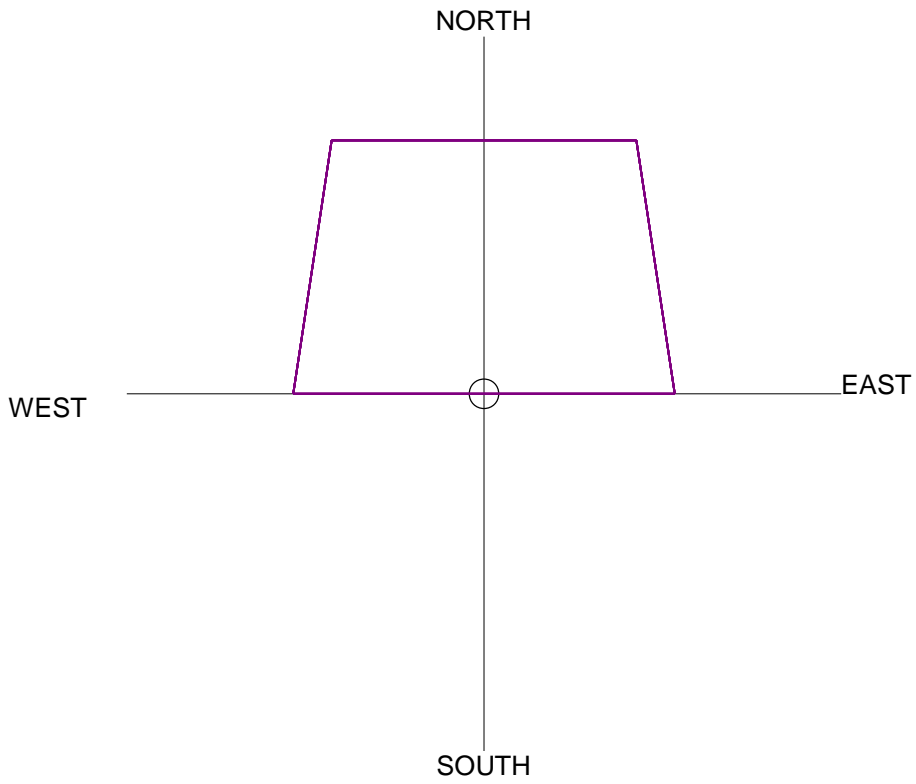

Side of antenna system

Az. 0°



TX station: EXAMPLE
 Frequency: 98.00 MHz

Site name: TEST16

Antennas arrays data

A. Antennas array azimuth (°N)	0
B. Number of antennas	8
C. Nominal power supply (W)	1000.00
D. Losses (addit. + cables) (dB)	1.0
E. Effective power supply (W)	794.33
F. Theor. maximum gain (dBd)	14.93
G. Distribution losses (dB)	0.00
H. Nominal max gain [F - G] (dBd)	14.93
I. Compensation losses (dB)	0.00
J. Effec. max gain [H - I] (dBd)	14.93
K. Effec. max gain (times)	31.12
L. Effec. max power [E * K] (KW)	24.7224
M. Max power depr. angle (°)	0.0


Diagram in dBK calculated at horizon

Az. (°N)	dBK	Az. (°N)	dBK	Az. (°N)	dBK	Az. (°N)	dBK
0	13.9	90	9.2	180	1.0	270	9.2
10	13.9	100	7.6	190	0.9	280	10.5
20	13.8	110	5.8	200	0.5	290	11.5
30	13.6	120	3.9	210	0.4	300	12.3
40	13.3	130	2.2	220	0.9	310	12.9
50	12.9	140	0.9	230	2.2	320	13.3
60	12.3	150	0.4	240	3.9	330	13.6
70	11.5	160	0.5	250	5.8	340	13.8
80	10.5	170	0.9	260	7.6	350	13.9

TX station: EXAMPLE
Frequency: 98.00 MHz

Site name: TEST16

Horizontal diagram

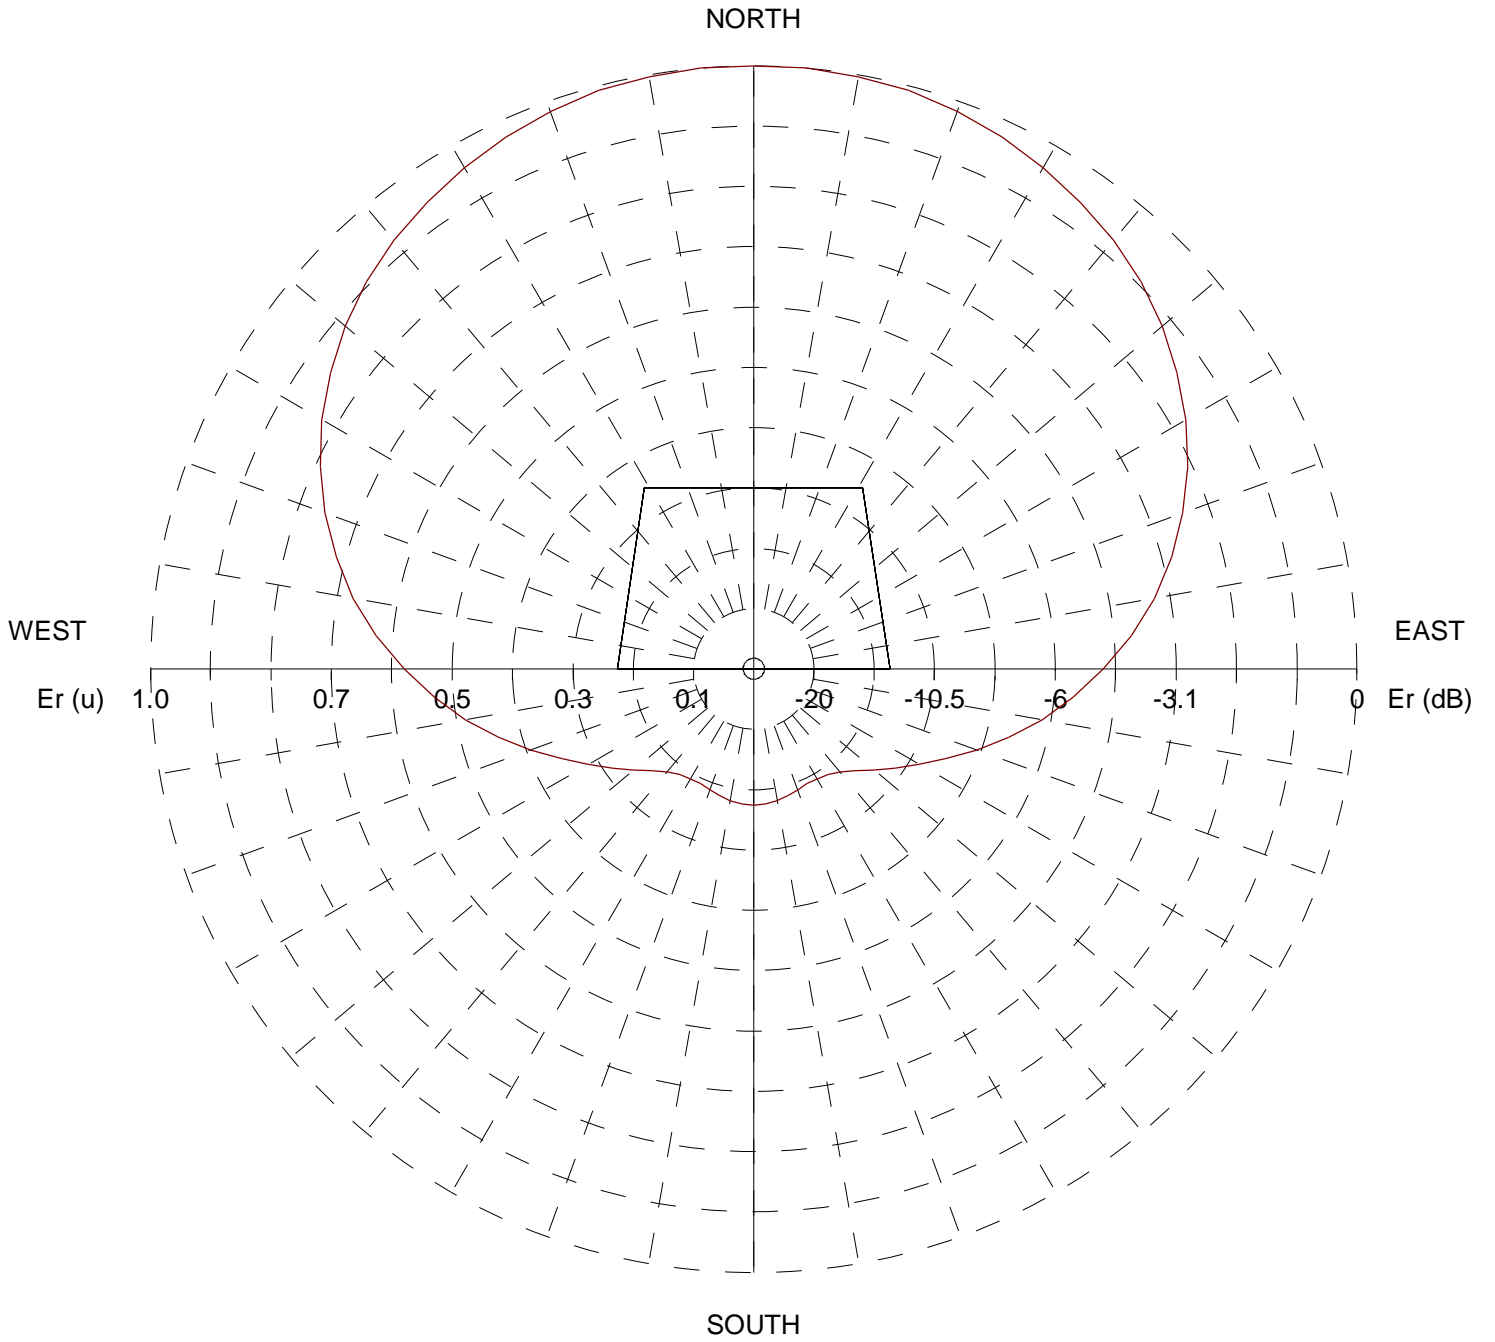

— 0.0° depres. (Total antenna), Gain (dBd): 14.9 ERP T.max (KW): 31.124 ERP E.max (KW): 24.722

TX station: EXAMPLE

Site name: TEST16

Frequency: 98.00 MHz

Vertical diagram

